

# SOCE037-60/80CM Installation instructions.

Please be sure to use a manual screwdriver and refrain from using an electric drill.



Eccentric rod + eccentric wheel	5*40 pointed screws	Small Nails	3.5*14 self-tapping screws	Tall hinge
D14*4	C1*16	K20*10	A2*40	F2*4

## Eccentric installation principle:

- Screw the eccentric screw onto the plate
- Find the corresponding board and insert it
- Rotate the board 180° clockwise to lock it
- Insert the eccentric bolt into the round hole
- 
- 

## Board part:

Missing numbers don't mean parts are missing. Just match the numbers to find and install the right parts

A2  
 F2  
 A2+F2  
 Legs 14x4

01 Cover plate  
 02 Left Panel  
 03 Right Panel  
 04 Base Plate  
 05 Pull Board  
 06 Shelf  
 07 Back Panel

## Step 1: Overall installation

<1>

The holes should face inward and be near the bottom

Eccentric wheel D14\*4

① Cover plate  
 ② Left Panel  
 ④ Right Panel

<2>

5\*40 pointed screws C1\*8  
 ⑦ Pull Board x 2

C1

<3>

5\*40 pointed screws C1\*4  
 ⑧ Shelf

C1

<4> Make sure the holes are facing forward

5\*40 pointed screws C1\*4  
 ⑤ Base Plate

C1

<5>

small nails K20\*10  
 ⑬ Back Panel

K20

# Door panel adjustment

<6>

3.5\*14 self-tapping screws  
A2\*16

Legs x 4

<7> Overall alignment



3.5\*14 self-tapping screws  
A2\*16

The location for installing the calibration chain is marked with a pinhole on the board. Use the smallest self-tapping screw to fix it. First tighten the two screws and wait for the gate to be adjusted. Then enter all screws

<8>


Installation completed!

Door gap is too big

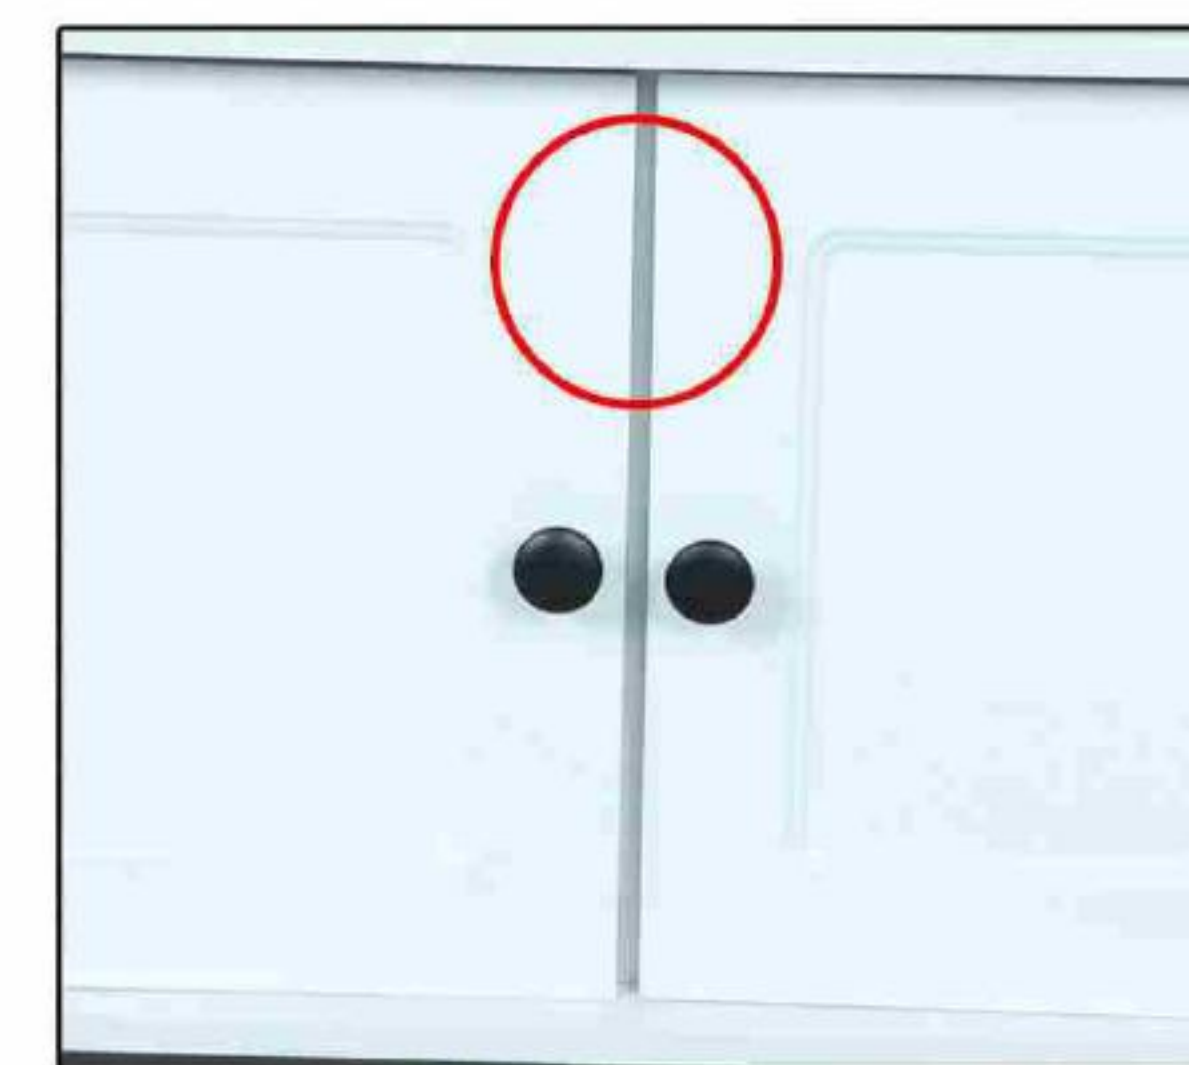




As shown in the picture, the screw that the screwdriver points to is used to adjust the door panel to move left and right, and turning it clockwise is to adjust the door panel to move toward the center.

The gap between the door panel and the side panel is too large

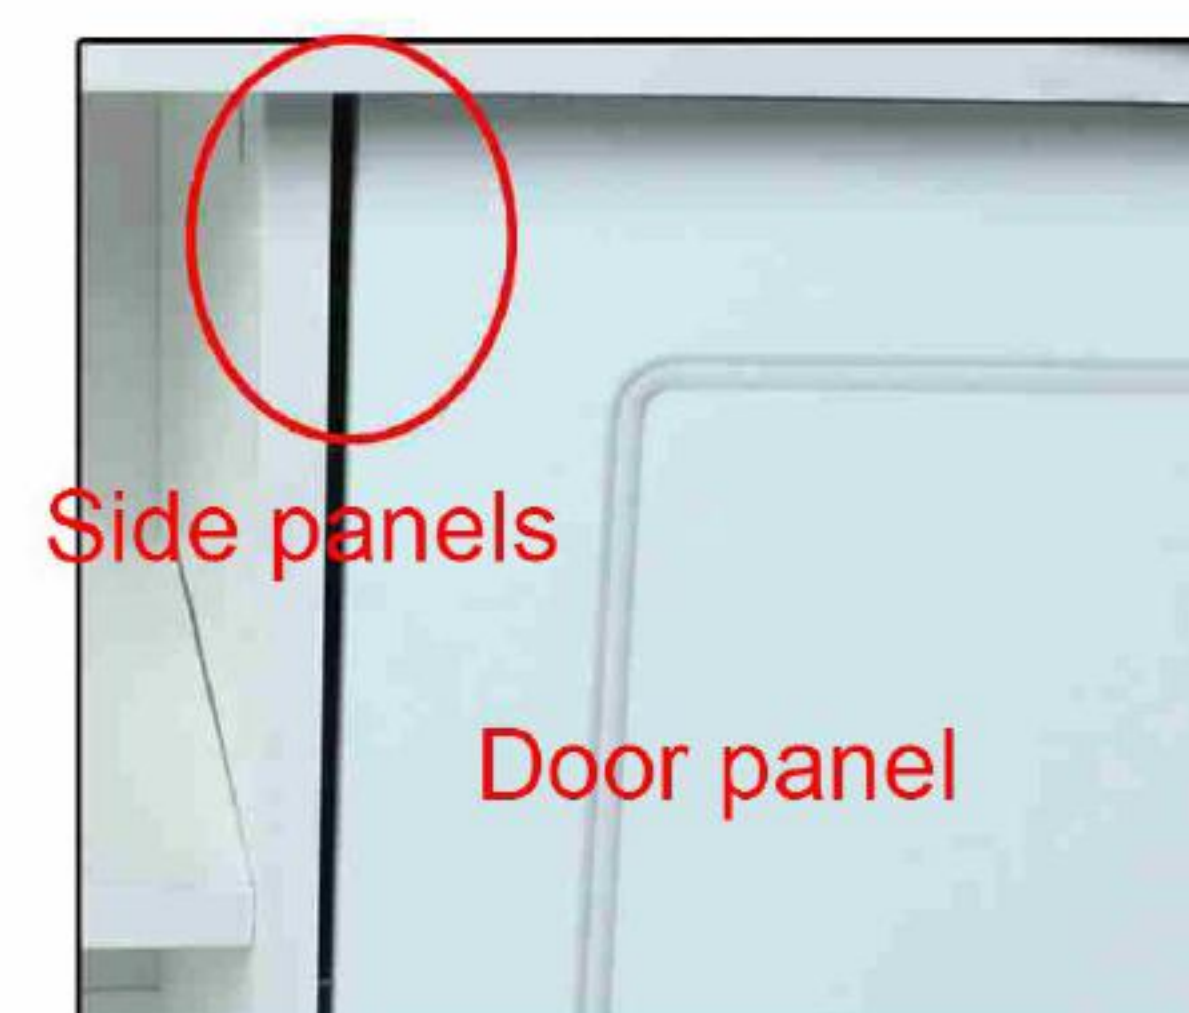

As shown in the figure, loosen the screw that the screwdriver points to, push the door panel in or pull it out, and then tighten it to solve the above problem.

Uneven door panel

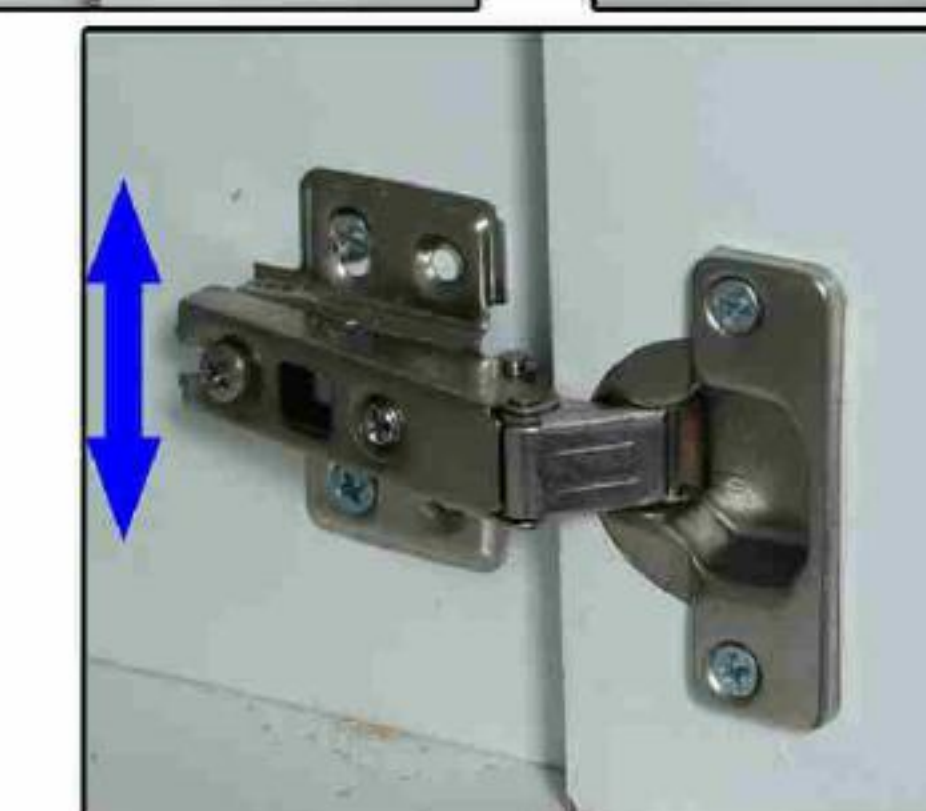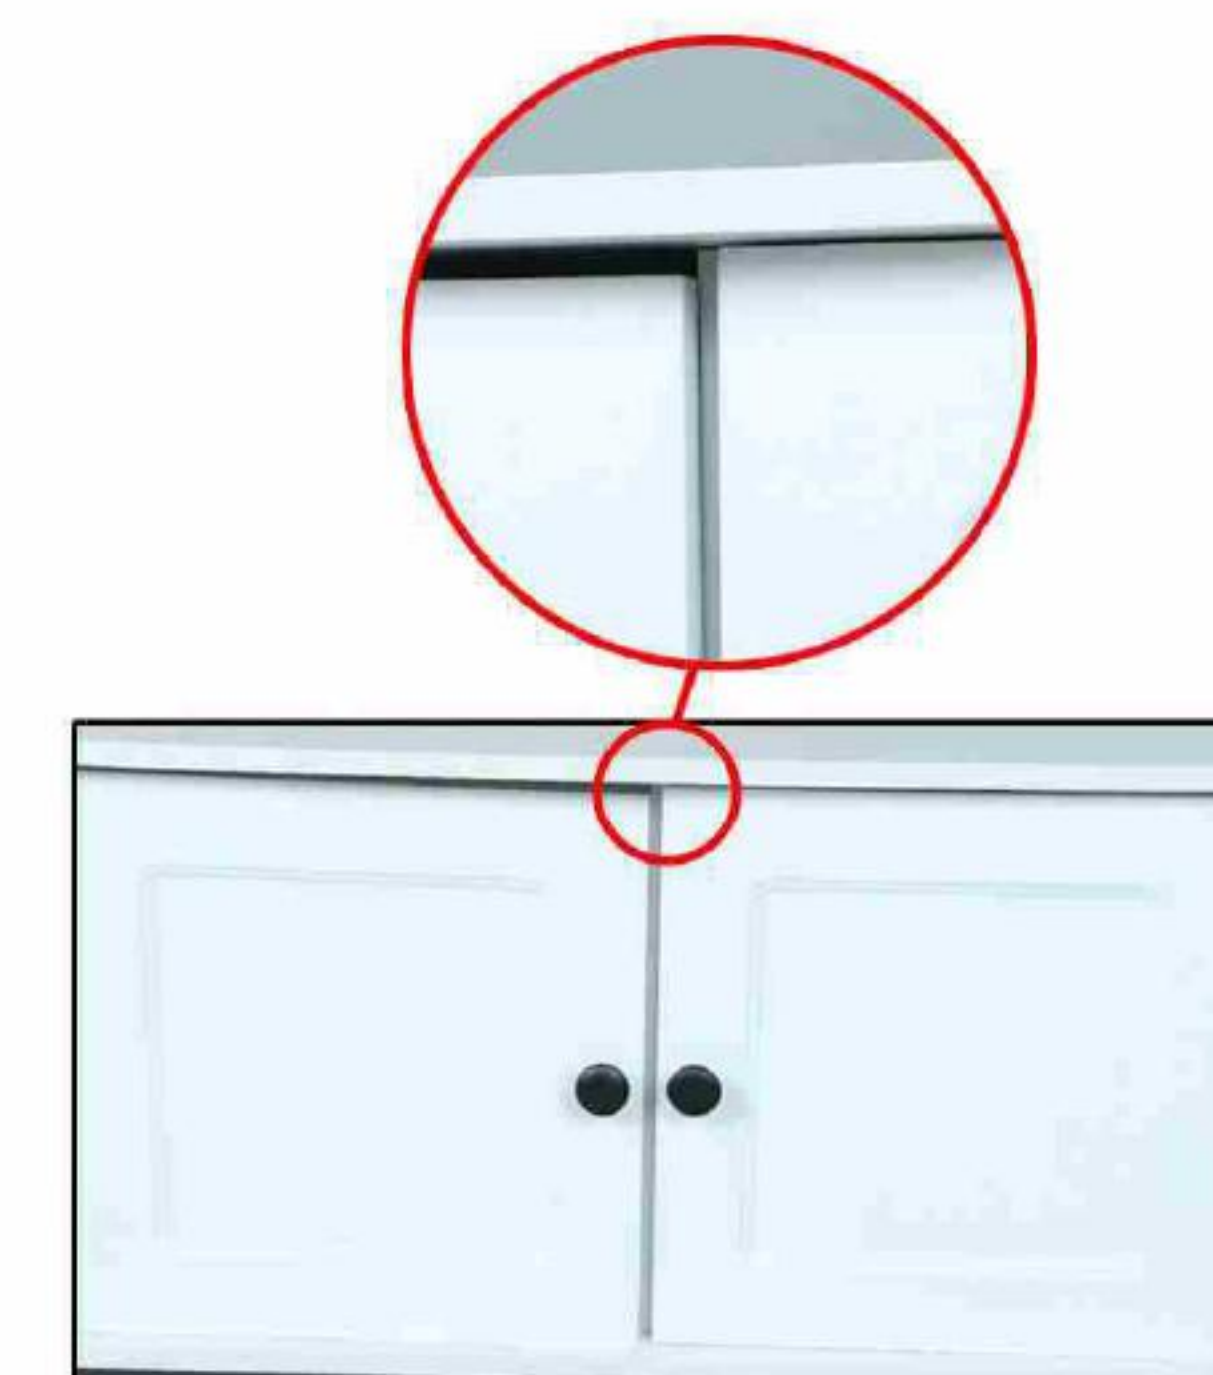

As shown in the figure, loosen the screw that the screwdriver points to, push the lower door panel and hinge upward, and then tighten the screw. Push the upper door panel and hinge downward, and then tighten the screw.